

GDS door

Double glazed flush door



GDS door

Technical Data

GDS doors offer greatly improved acoustic performance of 36Rw(dB) over plain glass leaf's without loss of light or vision.


GDS doors combine an aesthetically pleasing appearance alongside ease of installation.

GDS doors can be installed within any rebated door frame designed to accept a 44mm door.

GDS doors are fully compatible with all other Apton partition systems, giving you the flexibility to design both a functional and practical commercial office.

CONSTRUCTION

GDS is a double glazed flush door comprising of two sheets of 6mm toughened glass bonded to the outer faces of a 32mm polyester powder coated welded steel

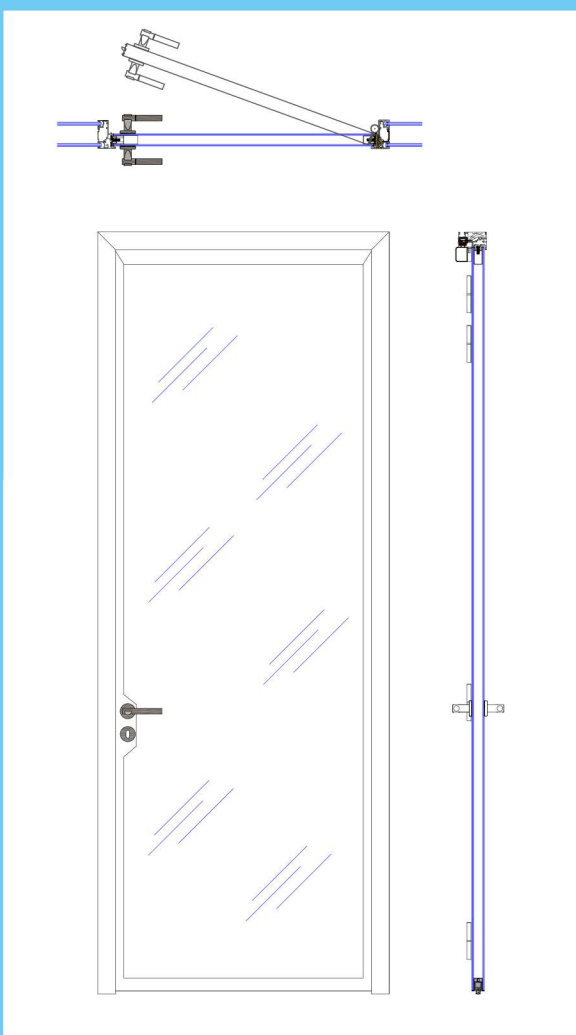

frame. GDS doors incorporate all door operating controls, seals and DDA compliant locks and latches allowing quick installation on site. GDS doors create a flush glazed, stylish acoustic solution to any modern environment.

STANDARD SIZE RANGE

Single door 926mm x maximum height 2900mm.

Double door 2 x 826mm x maximum height 2900mm.

DOOR FRAMES

Doors can be installed into aluminium, steel or timber door frames. Door frames can be standard or full height that provides a rebate suitable for a 44mm door. Single or double door sets are available.

DOOR CONTROLS

Recessed slide overhead closer.

SEALS

Drop down threshold seal.

FINISHES

GDS doors are available in a range of RAL colours.

ACOUSTICS

Sound reduction to 36Rw(dB).

ADDITIONAL OPTIONS

Swung on four stainless steel hinges.

Pull handle or lever and lock option.



GDS doors are designed and manufactured in the UK.



Romstor Ltd

Unit 22F West Station Industrial Estate,
Spital Road, Maldon, Essex, CM9 6TS

Tel: 01621 855 600

Freephone: 0800 328 4908

Email: sales@romstor.co.uk

www.romstorprojects.co.uk